



ASIA-WIFI 802.1x authentication[asia_wifi_dot1x]

Android Setting steps

1. Goto [Settings], then select item [Network & internet], then select [Wi-Fi].

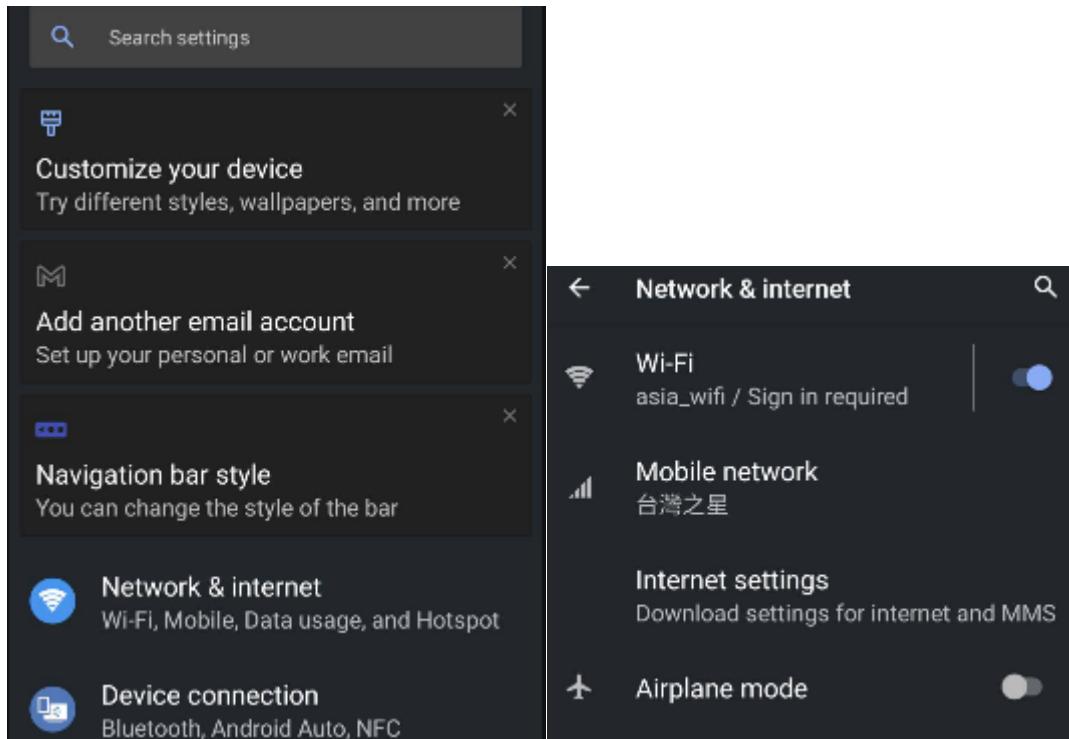


2. Press SSID **asia_wifi_dot1x** at [Wi-Fi] frame.

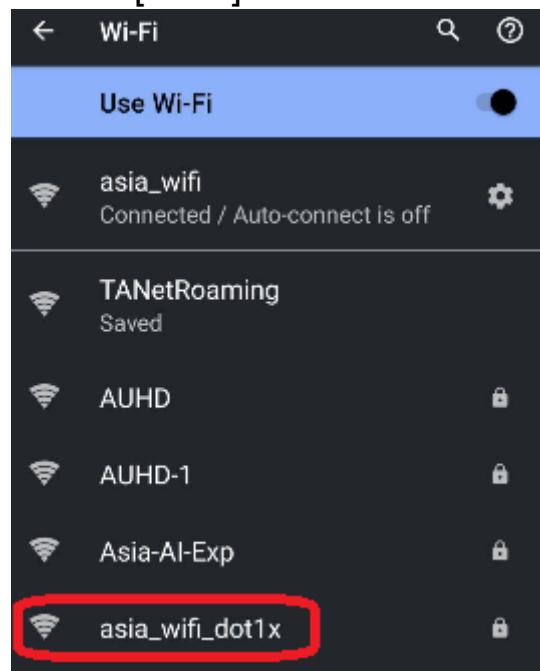


3. Select or Input fallow information , then press [CONNECT],

or set [Advanced options]. (for Android 10 later)

EAP METHOD	PEAP
PHASE 2 AUTHENTICATION	MSCHAPV2
CA certificate	Select [Do not validate] (for Android 11)
IDENTITY	Input your Asia Network ID(ANID)
PASSWORD	ANID password

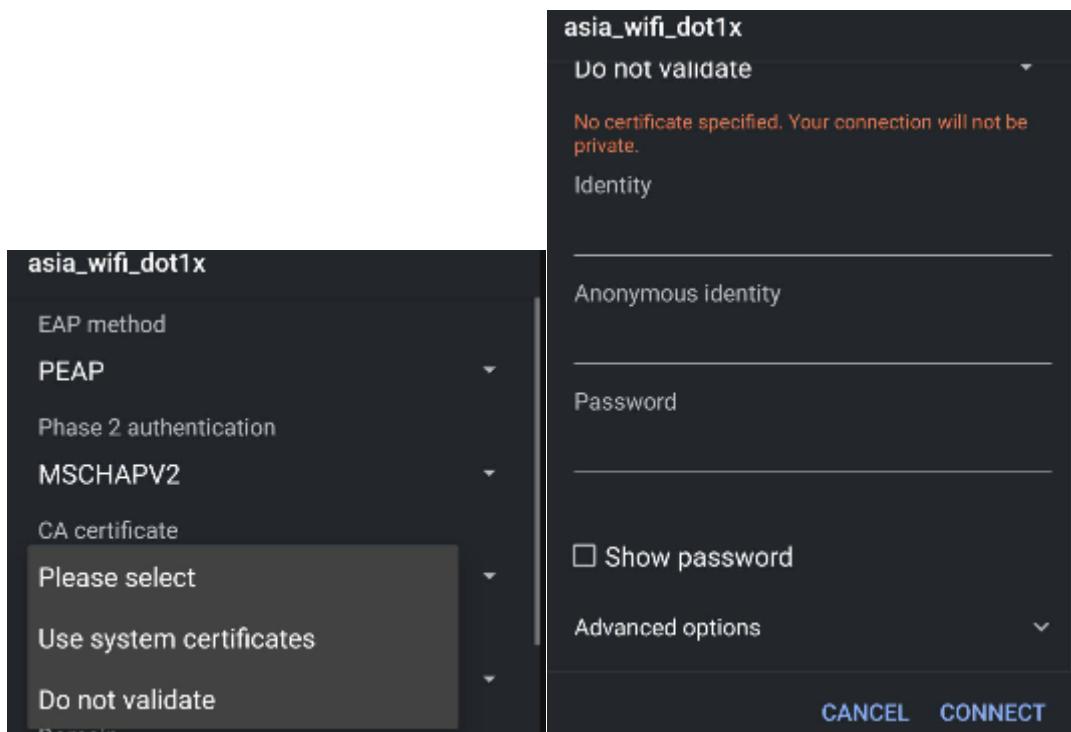

4. The item set in [Privacy] is changed to use device MAC

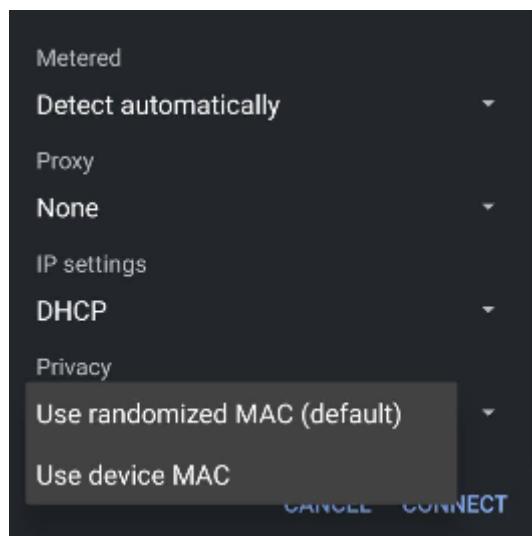

※When using a random MAC, the system will automatically change the MAC from time to time.

When the MAC is changed, re-authentication is required. During the re-authentication period, it will feel like a network interruption.

5.After the setup is complete, you can choose SSID [**asia_wifi_dot1x**] to connect.